



IMPAC®

IMPAC® Primer H

Water-based asphalt primer/ Cold applied

Description:

IMPAC® Primer H is a dark brown low-viscosity emulsion prepared from refined asphalt, anionic emulsifiers and stabilizer additives. A high-solids product that is diluted in water.

Use:

- **IMPAC® Primer H** is an easy-to-apply primer or filler for dry or slightly damp surfaces with outstanding bonding.
- As a sealer on walls.
- For concrete foundations and modified asphalt torch roll. It has a brown appearance when wet but will dry to black color.

Application:

- The surface must be clean, free from dust, oil, grease, paraffin and badly bonded material.
- The **IMPAC® Primer H** can be diluted up to 3 to 1 in volume with clean water, mixing both parts well.
- It can be applied using a brush and spray equipment.
- Diluted **IMPAC® Primer H** normally has a drying time of between 2 and 4 hours, depending on the temperature and relative humidity of the environment.
- Clean up with soap and water. Dry product with naphtha solvent.

Warning:


Keep out of reach of children. The product is water-based, therefore shall not be applied at an ambient temperature below 50 °F [10 °C] or when there is relative humidity of more than 80%, such as on days when there is a breeze or mist. Must not be applied if there is a possibility of rain before the product dries or on cloudy days, because the rainwater may wash the emulsion and/or affect the internal cohesion of the emulsion. Do not apply during the last hours of the day when the temperature is sufficiently low to produce dew, mist or frost. The application should preferably be done in hot and dry weather.

The surface should be lukewarm to touch and the weather forecasts not indicate rain for at least 48 hours. Sunny days are necessary to facilitate the curing of the asphalt emulsion. Do not dilute the product. It is not recommended for continuous contact with water. Wash the tool with soap and water before that the product dries. If the product has dried, thinner or petroleum naphtha must be used with the necessary care. If it comes into contact with your eyes and/or skin, rinse with as much water as necessary. If swallowed, go to the emergency medical services or your doctor.

Update: June 2020. These technical specifications replace any previous one up to this date. Visit our webpage www.impacusa.com where you can find the current version. Subjected to changes without notice.



Brown

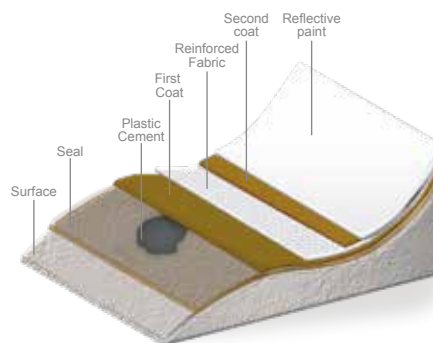

Storage:

Store indoors in a cool, dry place with its lid tightly on. Do not stack more than three buckets high.

TEST	VALUE
Color	Dark Brown
Toxicity	By ingestion
Density	1.01 ± 0.02 g/ml
PH	8.5 min
Solids by weight	48 ± 2%
Storage	12 months
Touch dry	50 min
Totally dry	4 hours
Spread Rate*	4 m²/L
Presentation	3.8L, 19L

*Varies depending on the surface