



IMPAC®

IMPAC® Primer

Acrylic Sealer for Roofs Coatings

Description:

IMPAC® Primer is an acrylic primer sealer that reduce porous and micro cracks on the substrate, decrease absorption of moisture on the surface and increase adherence on your acrylic waterproofing system.

Benefits:

- IMPAC® Primer eliminates porosity from surface.
- Improves waterproofing adherence.
- Improves waterproofing performance.
- Reduces moisture absorption.
- Environmental friendly.

Uses:

- IMPAC® Primer completely covers the porosity on different surfaces such as: concrete slabs, walls, bricks, cement boards, etc.

Application:

- Apply one coat with roll or brush over all surface. Let it dry 1 -4 hours. The surface must be clean and dry.

STORAGE

Store in a cool and dry place, the container must be tightly closed. Do not stow more than three buckets.

RECOMMENDATIONS:


Do not apply at temperatures lower than 50 °F or higher than 110 °F, neither in rainy days nor with a rainfall threat. Do not apply in humid surfaces. Do not apply when relative humidity is higher than 85% as in days with thin fog, breeze, mist, dew, etc. Clean tools with water after use. Wash with soap and water if contact with skin

KEEP OUT FROM THE REACH OF CHILDREN.

Update: June 2020. These technical specifications replace any previous one up to this date. Visit our webpage www.impactusa.com where you can find the current version. Subjected to changes without notice.



White

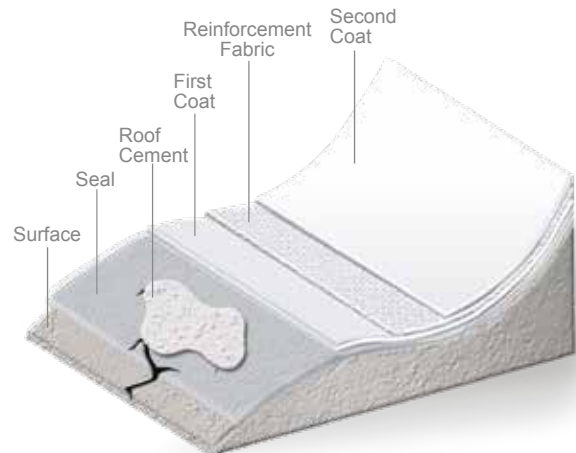

TEST	VALUE	STANDARD
Consistency	Liquid	
Color	Liquid: Milky, Dry: Transparent	
Density	9.18 lb/gal (1.10 +/- 0.05 kg/L)	ASTM D-1475
Viscosity	2,000 - 3,000 cps	ASTM D-2196
pH	8.0 - 9.5	ASTM E-70
Solids by weight	28% - 32%	ASTM D-1644
Coverage	Up to 646 sq.ft./5 gallons	
Presentation	5 gallons bucket	